
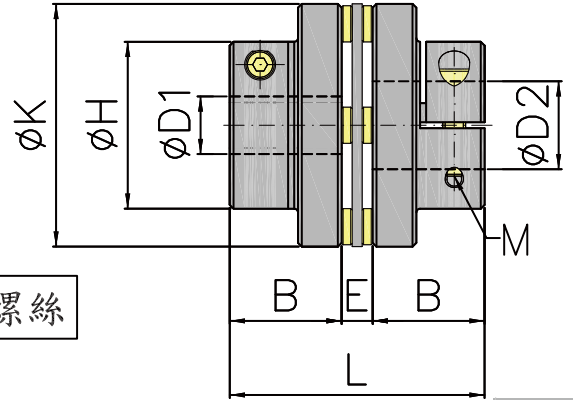


PH-T-35C- $\phi 6 \times \phi 12$

型號

孔徑



外徑 $\phi 56 \sim \phi 82$ -雙支螺絲

PH-T-C尺寸表

單位：mm

規格 NO	D1*D2/公差(H8)		H	K	B	E	L	M
	min	max						
PH-T-35C	6	12	25	35	13	3	29	M3
PH-T-40C	8	14	28	40	17	4	38	M4
PH-T-45C	10	19	32	45	18	4	40	M4
PH-T-56C	12	24	42	56	21	5	47	M5
PH-T-68C	14	25	46	68	24	5.3	53.3	M6
PH-T-82C	19	35	62	82	30	8.8	68.8	M8

PH-T-C特性表

材質：鋁合金

規格 NO	常規扭力 (N.m)	極限扭力 (N.m)	偏角 (度)	位移 (mm)	極限轉速 (rpm)	扭轉係數 (N.m/rad)	慣性矩 (kg.m ²)	重量 (g)
PH-T-35C	4	8	1	± 0.20	10000	1500	3.8×10^{-6}	33
PH-T-40C	6	12	1	± 0.25	10000	2800	12.5×10^{-6}	63
PH-T-45C	10	20	1	± 0.30	10000	3000	16.5×10^{-6}	76
PH-T-56C	25	50	1	± 0.40	10000	4200	48×10^{-6}	156
PH-T-68C	45	90	1	± 0.45	10000	6950	126×10^{-6}	270
PH-T-82C	95	190	1	± 0.55	10000	8600	565×10^{-6}	727



特性：高鋼性高扭矩、低慣性無背隙、適合工作母機高精密傳動、具伸縮抗震功能