


型號

孔徑

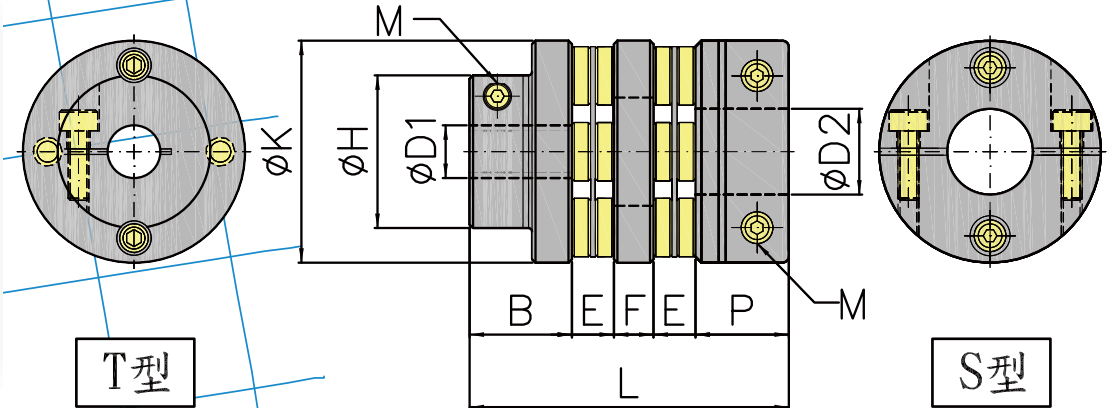

PH-TWS-C尺寸表

單位：mm

規格 NO	D1/公差(H8)		D2/公差(H8)		H	K	B	E	F	P	L	M
	min	max	min	max								
PH-TWS-35C	6	12	6	14	25	35	13	3	8	12	39	M3
PH-TWS-40C	8	14	8	16	28	40	17	4	10	15	50	M4
PH-TWS-45C	10	19	10	20	32	45	18	4	10	15	51	M4
PH-TWS-56C	12	24	12	25	42	56	21	5	12	20	63	M5
PH-TWS-68C	14	25	14	28	46	68	24	5.3	15.5	24	74.1	M6
PH-TWS-82C	19	35	18	36	62	82	30	8.8	21.5	30	99.1	M8

PH-TWS-C特性表

材質：鋁合金

規格 NO	常規扭力 (N.m)	極限扭力 (N.m)	偏心 (mm)	偏角 (度)	位移 (mm)	極限轉速 (rpm)	慣性矩 (kg.m ²)	重量 (g)
PH-TWS-35C	4	8	0.20	2	± 0.4	10000	3.8×10^{-6}	91
PH-TWS-40C	6	12	0.24	2	± 0.5	10000	12.5×10^{-6}	148
PH-TWS-45C	10	20	0.26	2	± 0.6	10000	16.4×10^{-6}	195
PH-TWS-56C	25	50	0.28	2	± 0.8	10000	48×10^{-6}	340
PH-TWS-68C	45	90	0.34	2	± 0.9	10000	126×10^{-6}	605
PH-TWS-82C	95	190	0.52	2	± 1.1	10000	565×10^{-6}	1310

特性：高鋼性高扭矩、低慣性無背隙、適合伺服馬達精密定位傳動、具伸縮抗震功能