



百安牌

撓性聯軸器爪型夾鉗式

PH-JC20- $\phi 5 \times \phi 9.525$

型號

孔徑

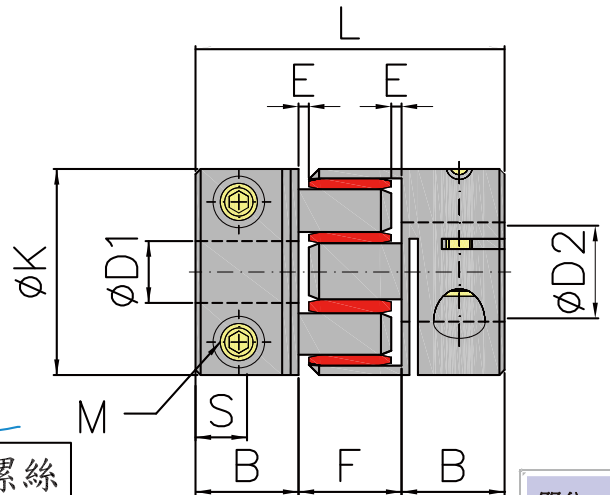

外徑 $\phi 20 \sim \phi 30$ -單支螺絲

單位：mm

PH-JC尺寸表

規格 NO	D1*D2/公差(H8)		K	S	B	E	F	L	M
	min	max							
PH-JC20	5	9.525	20	5	10.45	0.7	9.3	30.2	M2.5
PH-JC30	6	14	30	5.5	11.6	1	11.8	35	M4
PH-JC40	8	20	40	9	25.5	1.5	15	66	M5
PH-JC55	10	28	55	10.5	30.2	1.2	17.6	78	M6
PH-JC65	12	35	65	13	35.7	2	18.6	90	M6
PH-JC80	16	45	80	14	46.3	2	21.4	114	M10
PH-JC95	20	55	95	16	51.5	2	23	126	M10

PH-JC特性表

材質：鋁合金

規格 NO	常規扭力 (N.m)	極限扭力 (N.m)	偏心 (mm)	偏角 (度)	位移 (mm)	極限轉速 (rpm)	扭轉係數 (N.m/rad)	慣性矩 (kg.m ²)	重量 (g)
PH-JC20	5	10	0.1	1	± 0.8	19000	55	1.1×10^{-6}	20
PH-JC30	12.5	25	0.1	1	± 1.0	13000	135	5.9×10^{-6}	40
PH-JC40	17	34	0.1	1	± 1.2	9600	1100	39×10^{-6}	150
PH-JC55	60	120	0.1	1	± 1.4	7000	3200	170×10^{-6}	350
PH-JC65	160	320	0.1	1	± 1.5	5900	4900	380×10^{-6}	500
PH-JC80	325	650	0.1	1	± 1.8	4800	7400	1120×10^{-6}	1000
PH-JC95	450	900	0.1	1	± 2.0	3600	14000	1900×10^{-6}	1500

特性：高鋼性高扭矩、低慣性無背隙、適合伺服馬達精密定位傳動、可正逆轉特性