



撓性聯軸器爪型止付式

PH-J20- $\phi 5 \times \phi 9.525$ - K

型號

孔徑

鍵槽

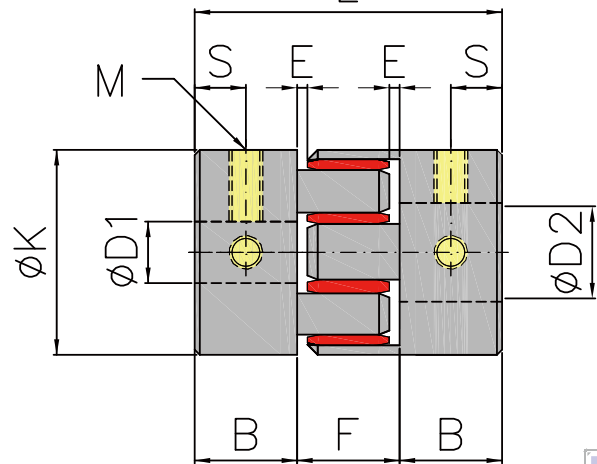

PH-J 尺寸表

單位：mm

規格 NO	D1*D2/公差(H8)		K	S	B	E	F	L	M
	min	max							
PH-J20	5	9.525	20	5	10.45	0.7	9.3	30.2	M3
PH-J30	6	14	30	5.5	11.6	1	11.8	35	M4
PH-J40	8	20	40	12.5	25.5	1.5	15	66	M5
PH-J55	10	28	55	15.5	30.2	1.2	17.6	78	M6
PH-J65	12	35	65	17.5	35.7	2	18.6	90	M8
PH-J80	16	45	80	23	46.3	2	21.4	114	M8
PH-J95	20	55	95	25.5	51.5	2	23	126	M10

PH-J 特性表

材質：鋁合金

規格 NO	常規扭力 (N.m)	極限扭力 (N.m)	偏心 (mm)	偏角 (度)	位移 (mm)	極限轉速 (rpm)	扭轉係數 (N.m/rad)	慣性矩 (kg.m ²)	重量 (g)
PH-J20	5	10	0.1	1	±0.8	19000	55	1.1×10 ⁻⁶	20
PH-J30	12.5	25	0.1	1	±1.0	13000	135	5.9×10 ⁻⁶	40
PH-J40	17	34	0.1	1	±1.2	9600	1100	39×10 ⁻⁶	150
PH-J55	60	120	0.1	1	±1.4	7000	3200	170×10 ⁻⁶	350
PH-J65	160	320	0.1	1	±1.5	5900	4900	380×10 ⁻⁶	500
PH-J80	325	650	0.1	1	±1.8	4800	7400	1120×10 ⁻⁶	1000
PH-J95	450	900	0.1	1	±2.0	3600	14000	1900×10 ⁻⁶	1500

特性：高鋼性高扭矩、低慣性無背隙、適合伺服馬達精密定位傳動、可正逆轉特性