

百安牌


高剛性鋼片聯軸器間隔套型

PH-68-W- $\phi 10 \times \phi 25$ - K

型號

孔徑

鍵槽

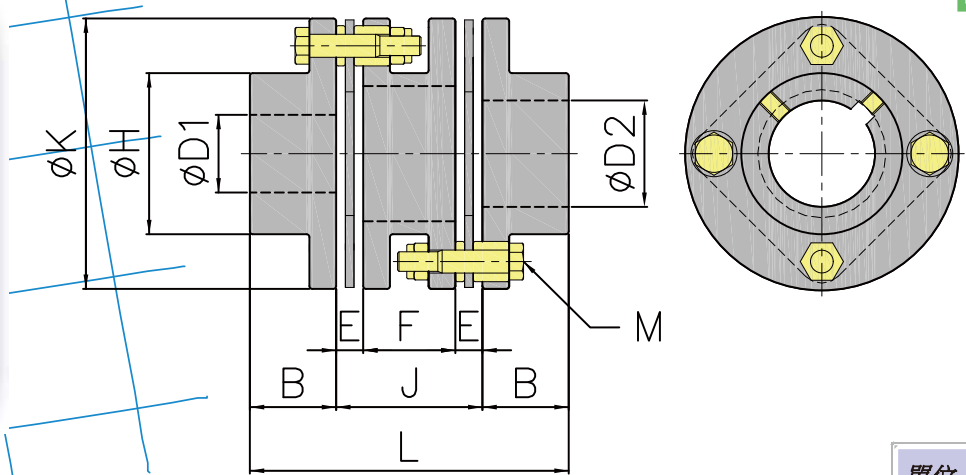

PH-W尺寸表

單位: mm

規格 NO	D1*D2/公差(H8)		H	K	B	E	F	J	L	M
	min	max								
PH-68-W	10	25	38	68	25	5.3	23.8	34.4	84.4	M6
PH-82-W	12	35	52	82	25	6	25.8	37.8	87.8	M6
PH-94-W	14	40	56	94	30	9.4	30.4	49.2	109.2	M8
PH-105-W	16	45	66	105	33	10	30.6	50.6	116.6	M8
PH-128-W	25	50	78	128	40	11	41.6	63.6	143.6	M10
PH-144-W	30	55	90	144	45	11.6	45.6	68.8	158.8	M10
PH-168-W	35	70	105	168	57.2	16.8	44.4	78	192.4	M14
PH-194-W	40	80	118	194	64.5	15	55	85	214	M16
PH-214-W	45	95	137	214	76.2	21.6	53.8	97	249.4	M16
PH-246-W	50	110	156	246	88.9	23.9	61.2	109	286.8	M20
PH-276-W	70	120	169	276	101.6	27.2	79.6	134	337.2	M24

PH-W特性表

材質: S45C

規格 NO	常規扭力 (N.m)	極限轉速 (rpm)	本體最大軸徑			彈簧定數 (N.m/rad)
			標準N	延長L	擴大K	
PH-68-W	45	19000	25	25	30	1.18×10^4
PH-82-W	95	17000	35	35	40	3.92×10^4
PH-94-W	175	15000	40	40	42	7.84×10^4
PH-105-W	245	12000	45	45	48	12.7×10^4
PH-128-W	440	11000	50	50	60	21.6×10^4
PH-144-W	780	10000	55	55	70	39.2×10^4
PH-168-W	1270	9000	70	70	80	73.5×10^4
PH-194-W	2060	8000	80	80	90	113×10^4
PH-214-W	3330	7500	95	95	110	162×10^4
PH-246-W	5290	3400	110	110	120	214×10^4
PH-276-W	6860	3100	120	120	130	291×10^4

備註:目錄總長度L為標準品,有需求可以加長總長度,但需另外告知,製作也要些時間