


百安牌

臥式直接法蘭高比數齒輪減速機

PHSEF

HORIZONTAL INPUT FLANGE HIGH RATIO GEAR REDUCER

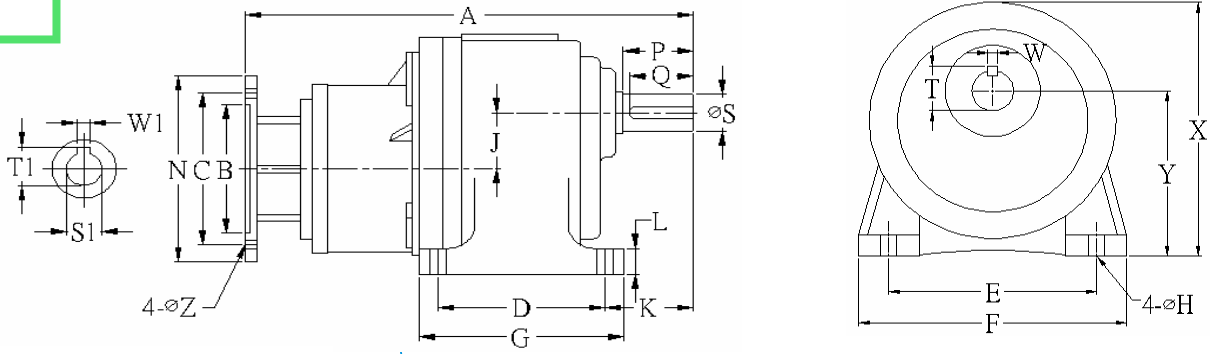

馬力	入力孔尺寸			出力軸端					
	入力孔	鍵槽		出力軸		鍵槽		鍵	
	S1	W1	T1	S φ	P	W	T	Q	SPEC
1/4HP	11	4	13	28 φ	45	7	31.5	40	7*7*40
1/2HP	14	5	17	32 φ	55	10	36	50	10*8*50
1HP	19	6	22	40 φ	65	10	44	60	10*8*60
				50 φ	80	14	56	75	14*12*75

PHSEF 尺寸表

單位：m/m

馬力 HP	減速比 Gear Ratio	型號	A	B	C	D	E	F	G	H	J	K	L	N	X	Y	φZ
0.2KW 1/4HP * 4P	1/200-1/1800	28	286	110	130	90	140	180	120	11	36.8	69	15	160	178	116	M8
0.2KW 1/4HP * 4P	1/200-1/1800	32	350	110	130	130	170	215	160	13	48.4	69.5	22	160	210	139	M8
0.4KW 1/2HP * 4P	1/201-1/1800	32	350	110	130	130	170	215	160	13	48.4	69.5	22	160	210	139	M8
0.4KW 1/2HP * 4P	1/201-1/1800	40	391	110	130	150	210	270	195	15	63	84.5	25	160	252	160	M8
0.75KW 1HP * 4P	1/201-1/1800	50	489	130	165	170	265	330	230	19	72.2	122	30	200	362	200	M10